


Operation Instruction

LPLSRM01-SMS


Preface

Before using this remote control , please read these instructions carefully, it will bring you the operation and use of more convenient, more can reflect the excellent performance of the remote control.

Display

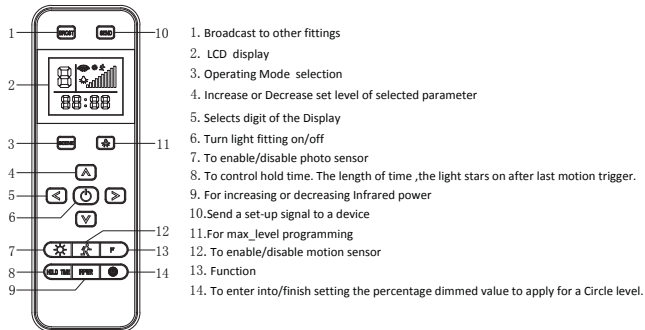


Indicators on the LCD



Install the battery

Installation of the battery

Open the battery cover, insert two new AAA alkaline batteries following the "+" / "-" sign in the battery compartment.

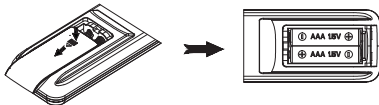

About the battery

- Don't mix of old and new batteries ,don't mix different types of batteries .
- If the battery leaks, they must be removed, clean the housing with warm soapy water.
- If you plan not to use your remote control for a long time, please remove the batteries.

Technical parameters

The shell material:ABS
 Battery type:DV 3V (AAA)
 Appearance of size:W134XD44XH22
 Weight:About 70 g

After-sales service

If you are using the remote control and encounter problems, please contact your local distributor, who can provide you with best service. The local distributor can put you in contact with us for extra support.

Notice

For more details, you can refer to operation guide in LCD panel light box.